


KD-MS4x4G

4x4 4K/18G HDMI Matrix Switchers, with Independent Audio Switching, Balanced/Unbalanced Audio, Audio De-embedding of Analog L/R/PCM

Key Features

- » **HDMI Matrix Switching:** 4 HDMI sources to 4 HDMI outputs
- » **Ultra HD/4K Support:** 4096x2160 or 3840x2160 24/25/30/60hz at 4:4:4 (signals up to 18Gbps bandwidth)
- » **HDCP Licensing:** Fully licensed and compatible with HDCP 2.2
- » **HDR10 (High Dynamic Range):** More life-like images through a greater range of luminance levels
- » **Resolution Support:** Supports all SD, HD, and VESA (VGA, SVGA, XGA, WXGA, SXGA, UXGA) up to 4096x2160p
- » **Deep Color Support:** Up to UHD/4K 60Hz 4:2:0/12 bits, 60Hz 4:2:2/12 bits
- » **Independent Audio and Video Matrix:** Output HDMI and Audio ports may switch together or independently
- » **Full Buffer System™:** Manages TMDS re-clocking / signal re-generation, HDCP authentication to source & display, and EDID Control handshake
- » **EDID:** Internal library with 15 internal EDID configurations per input, in addition to native EDID data for any Output/Display
- » **TMDS re-clocking:** Long HDMI connectivity support with Key Digital® HDMI cables
- » **Lossless Compressed Digital Audio:** Dolby® TrueHD, Dolby® Digital Plus, DTS-HD Master Audio™, and Dolby® Atmos
- » **Control:** Front panel buttons/LEDs, Serial IR, Optical IR, RS-232 Control, and TCP/IP Control
- » **Control System Support:** Key Digital® app ready. Key Digital Management Software™ Pro (KDMS™ Pro) ready, Compass Control® Pro ready. Fully controllable by all IR, RS-232, and TCP/IP supported control systems via open API.
- » **Key Digital® App & KDMS® Pro Ready:** Scan & detect population for pre-built GUI and TCP/IP control via Key Digital® iOS App and Key Digital Management Software™ Pro (KDMS™ Pro) PC Software

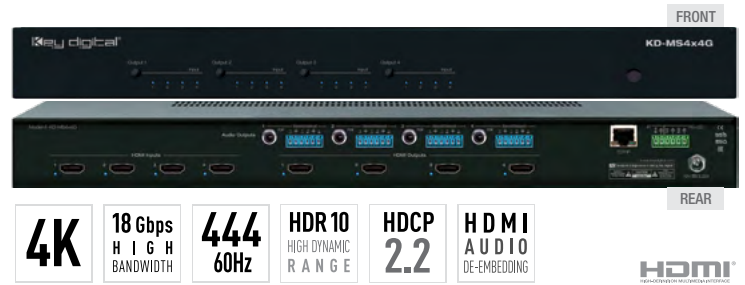

Specifications

- » Input (Each): 1 HDMI Connector, Type A, 19 Pin Female
- » Output (Each): 1 HDMI Connector, Type A, 19 Pin Female
- » Output (Each): Balanced/unbalanced line level audio on 6-pin terminal block. Drives 2VRMS line audio input with a sampling rate of 192KHz
- » Output (each): RCA female for digital audio following SPDIF format (IEC 60958). Supports sampling rate up to 192KHz
- » Power: 12V/3.3A (40W) AC Power Supply with Grounded, 2.1mm ID DC Power Jack with Screw In Type.
- » Regulation: CE, RoHS, WEEE
- » Rack Mount: 1U, 1 Rack Width (rack ears included)
- » Enclosure: Black Metal
- » Dimensions: L = 17.32" W = 5.78" H = 1.72"
- » Shipping Carton Dimensions: L = 23.4" W = 8.54" H = 2.36"
- » Product Weight: 6 lb
- » Shipping Weight: 9 lb
- » Accessories: IR Remote, UL Certified Power Supply

System Design Example

